




12V7Ah Rechargeable
Backup Battery

A proper Backup Plan starts with a **Rechargeable Backup Battery**

The rechargeable backup battery provides power to i-Neighbour Siren Kit when the primary source of power is unavailable. With the right backup battery, your system won't have to be interrupted during a power failure.

The external Rechargeable Backup Battery is almost always used in an access control system. The backup battery prevents intruders from disabling the access control by turning off power to the building, and continues locking the doors secured by the system.

Installation Diagram *for illustration only

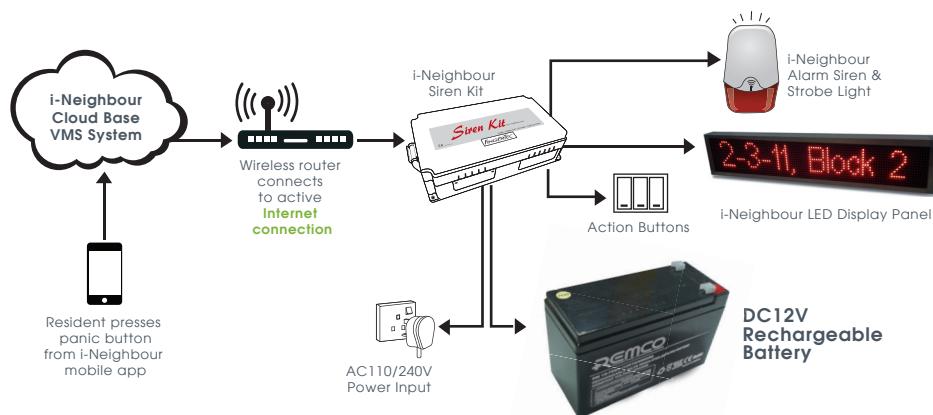

Mobile Application:



Specifications

DIMENSION (BODY)	150 x 64 x 92mm
WEIGHT	1.96 kg
DIMENSION (BATTERY TERMINALS)	4.8 x 0.8 mm
VOLTAGE	12VDC
CAPACITY	7Ah
TECHNOLOGY	Seal Lead Acid
CYCLE USE	14.5 to 14.9VDC
STANDBY USE	13.6 to 13.8VDC
INITIAL CURRENT	< 2.8A
STANDBY CHARGE VOLTAGE	13.8V
ESTIMATED STANDBY TIME (1 TERMINAL, 1 SET OF DOOR LOCK)	7 hours