

Confirmed. It's me.



FingerTec Face ID 2
2-in-1 Face & Fingerprint Recognition Terminal

With One Look, You are Good To Go!


Advancement of technology has made biometrics technologies commercially viable and affordable. FingerTec is taking a step forward in biometrics business by introducing the latest face recognition technology product to the worldwide market with FingerTec Face ID 2.

This product of the future can identify an identity in split seconds without any contact or hassle. The FingerTec Face ID 2 only requires user to look at the machine to get verified; it is as simple as it gets.

FingerTec Face ID 2 is loaded with a powerful microprocessor that can process dual biometrics authentication methods, fingerprint and face, for accurate personal identifications and for collection of precise data for time attendance and door access purposes. In addition, FingerTec Face ID 2 also accepts card verification for an added security measure.

Data communication is made possible through USB flash disk port and the common protocol TCP/IP, and data from the FingerTec Face ID 2 is processed by TCMS V2 software, the powerful software compatible with all FingerTec products.

If you are looking for contactless, hassle free biometrics product, choose FingerTec Face ID 2. With one look, you are good to go!



FEATURES & BENEFITS

TIME ATTENDANCE

- Eliminates "buddy-punching" occurrences.
- Collects clocking data systematically.
- Manages data quickly and effectively via powerful software.
- Integrated with scheduled bells.

ACCESS CONTROL

- Curbs unauthorized access.
- Monitors staff's movement at any time.
- Integrates with door lock system easily (DC12V 3A EM Output).

MULTIMEDIA

- Workcodes are available to allow user to input clocking reasons.
- Private message short display intended for particular users.
- 65k color TFT screen display for vivid color and presentation.
- Local language greetings and display available.
- Touch screen panel for easy operation.

CONNECTIVITY

- TCP/IP, RS232 and RS485 connections.
- Multi-terminals powered by TCMS V2.
- USB port available to ease data transfer.
- International standard Wiegand output to support 3rd party controllers.

WEB LINK



Product
• <http://info.fingertec.com/faceid2-1>



Quick Start Guide
• <http://info.fingertec.com/faceid2-2>



Installation Guide
• <http://info.fingertec.com/faceid2-3>



User Guide
• <http://info.fingertec.com/faceid2-4>



Video Guide
• <http://info.fingertec.com/faceid2-5>




Technical Tips
• <http://info.fingertec.com/faceid2-6>

LAYOUT PLAN


System Communication

for illustration only

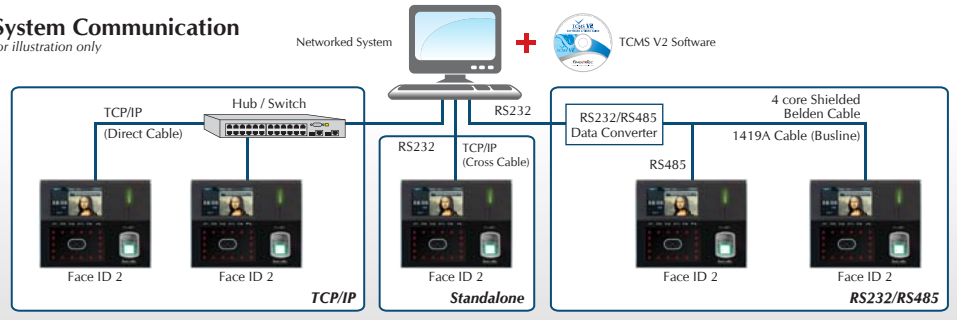

Installation Diagram

for illustration only

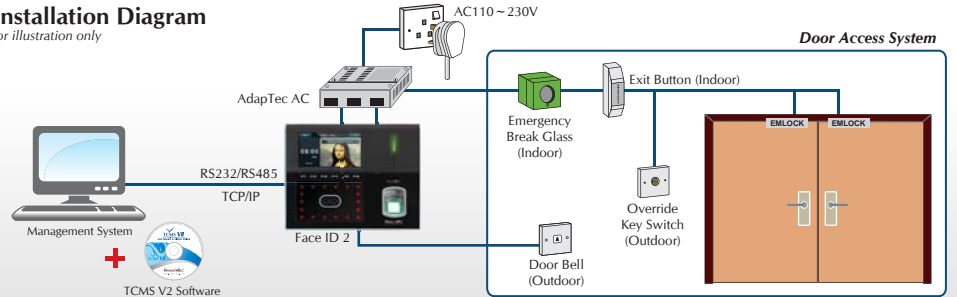

SPECIFICATIONS

MODEL	Face ID 2
SURFACE FINISHING	Acrylonitrile Butadiene Styrene (ABS) & Acrylic
TYPE OF SCANNER	High resolution infrared camera, Optical fingerprint scanner & card scanner
PROCESSOR	630 MHz microprocessor
MEMORY	256MB Flash Memory & 64MB SDRAM
ALGORITHM	BioBridge FaceVX.0, Fingerprint BioBridge VX 10.0 (optional BioBridge VX 9.0)
PRODUCT DIMENSION (L X W X H), mm	207 x 120 x 145
STORAGE	
• Fingerprint templates	10000
• Face templates	400
• Card	10000
• Transaction logs	200000
ENROLLMENT & VERIFICATION	
• Methods	Face, fingerprint, card or password
• Recommended fingerprint per user ID	2
• Fingerprint placement	Any angle
• Verification time – Face, sec	< 2
• Verification time – Fingerprint, sec	< 1
• Fingerprint	FAR < 0.0001%, FRR < 0.1%
• Face	FAR < 0.01%, FRR < 0.1%
CARD TECHNOLOGY	
• RFID: 64-bit, 125kHz	Yes
• MIFARE: MFIS50/S70, 13.56MHz	Made to order
• HID: HID 1325, 26-bit, 125kHz	Made to order
COMMUNICATIONS	
• Method	TCP/IP, RS232, RS485, USB flash disk (Optional - GPRS, WiFi)
• Baud rates	19200 ~ 57600
• Wiegand	26-bit output
OPERATING ENVIRONMENT	
• Temperature (°C)	0 ~ 45
• Humidity (%)	20 ~ 80
• Power input	DC12V 3A
TIME ATTENDANCE	
• Siren	Built-in and External
• Work codes	Yes
• Fast transaction checking	Yes
MULTIMEDIA	
• Display	4.3" 65K color TFT Touch Screen Panel
• Photo-ID	Yes
• Short messaging	Yes
• Day Light Saving Timer	Yes
• Internal Backup Battery	Yes (DC12V, 2000mAh)
ACCESS CONTROL	
• EM lock driving output	DC12V / Relay output
• Alarm output	NO / NC
VOICE / DISPLAY LANGUAGE (TERMINAL)	English (Standard) / (Upon Request - Arabic / Indonesian / Spanish / Turkish / Thai / Polish / Korea / Romanian / Portuguese / Dutch / Chinese / French / Slovenia/ Russian/ Greek / Hebrew / Persian / Italian / Vietnamese / Czech / Bulgarian)
SOFTWARE LANGUAGE	English, Arabic, Indonesian, Spanish, Chinese, Thai, Vietnamese, French, Persian, Italian, Russian, Malay, Portuguese, German, Turkish

* N/A: Not applicable



Packaging

Dimension (mm): 298(L) x 123(W) x 222(H)
Weight : 1.9kg

Authorized Reseller:



FINGERTEC
www.fingertec.com

©2011 FingerTec Worldwide Sdn. Bhd. All rights reserved.