



To meet the demands of small-sized companies, OFIS TA incorporates the highly sensitive PC-based fingerprint scanner with TCMS V2 to produce an effective time and attendance system that is not only user-friendly but also fraud proof. With OFIS TA there is no complicated hardware installation required and the system can be applied to any environment that has computers. In addition to providing simple solutions to smaller sized companies, OFIS TA also can be used as enrollment stations for larger corporations that are deploying multiple units of FingerTec readers in their corporations.

OFIS TA can store as many fingerprint templates as possible depending on the storage capacity of the computer and the fingerprint templates from OFIS TA are transferable to all FingerTec readers. Therefore, the templates captured can be used as main templates and they can be transferred to select readers accordingly.

OFIS TA- a simple fingerprint solution that provides superior benefits to all FingerTec users.







FEATURES & BENEFITS

- Combination of PIN and biometrics or ONLY biometrics verification to eliminate fraud
- Fast and precise verification with FingerTec OFIS Scanner
- Allow 1:1 and 1:N fingerprint verifications
- Unlimited user capacity for 1:1 fingerprint verifications; 1:N based on PC capacity
- Hassle-free fingerprint registration and verification
- · Works well with dry, moist or rough fingerprints

MINIMUM SYSTEM REQUIREMENTS

- Pentium III 450MHz or higher PC compatible processor
- 128MB RAM and above
- 30MB free disk space for TCMS V2 software, recommended 100MB or higher for database
- Microsoft Windows XP/Windows Vista/Windows 7
- Latest updates and patches for Microsoft Windows are recommended

WEB LINK



- http://info.fingertec.com/ofista-1
- http://info.fingertec.com/ofis-y-ta-1



? User Guide

• http://info.fingertec.com/ofista-2



Video Guide

• http://info.fingertec.com/ofista-3




Technical Tips

• http://info.fingertec.com/ofista-4

SYSTEM DIAGRAM

Single OFIS TA (Standalone)

NOTE: For illustration only *PC is not included

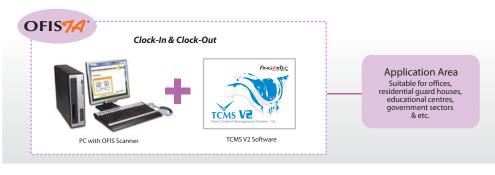

OFIS TA as Enrollment Stations



SCANNER SPECIFICATIONS





Model	OFIS – X	OFIS – Y
Algorithm	BioBridge VX 9.0 / VX 10.0	
Supporting OS	32-bit Windows XP, Windows Vista, Windows 7	32/64-bit Windows XP, Windows Vista, Windows 7, Windows Server 2008
Pixel resolution	512 dpi (average x, y over the scanning area)	
Scan capture area	17mm (width at the center), 26 mm (length)	15mm x 18 mm
Scan data	8-bit grayscale (256 levels of gray)	
Reader size (approximate) (L x W x H), mm	87 x 58 x 24	45 x 78 x 40
Compatibility	USB 1.0, 1.1 and 2.0 (Full speed) specifications	
OS/Browser	MS Windows/ MS Internet Explorer (IE 9)	
Power supply	5.0V +/- 0.25V USB supply	
Operating temperature (°C)	0 – 40	0 – 55
Operating humidity (%)	20 – 80 non-condensing	
Standard FCC Class	FCC Class B, CE, USB	
Usage	Indoor, home and office use	



Packaging

• OFIS TA

Dimension (mm) :135 (L) x 49 (W) x 164 (H)

Weight :0.32kg

• OFIS-Y TA

Dimension (mm) :135 (L) x 49 (W) x 164 (H)

Weight :0.34kg









Authorized Reseller: