


Slaves are essential in a Smart Access Control system



R2c Slave Terminal



FingerTec R2c is a slave terminal designed to serve FingerTec master terminals such as R2 (FEM565), AC900, Q2i, H2i and R3 for a more cost-effective IN-OUT access control system. The sleek-looking, compact, and space-reserving R2c establishes a connection via the RS485 interface to the master terminal. Besides that, the R2c is also recommended as a fingerprint slave terminal for FingerTec Ingressus Controllers to form a centralized access control system.



Cost Effective

To maintain an IN-OUT access control system using fingerprint access, you no longer need to invest in two master terminals. Replace one with an R2c and reduce your cost significantly.




Small Size

With a width and height of 4.2 cm and 13.5 cm respectively, the size of the R2c is ideal for most office environments.




Verification and Storage in Master or Controller

A simple mechanism applied to R2c, all verifications and data storage are managed by a master terminal or controller.



Simple RS485 Connection

The R2c is designed with the standard RS485 communication port, to ease connection with the FingerTec fingerprint terminals and controllers.




Flexible Installation Distance

The installation distance between the master terminal and the R2c slave terminal can go as far as 10 meters with a standard 4-core shielded Belden cable.



Precise Recognition with Biometrics

R2C utilizes advanced fingerprint technology that ensures that only enrolled users are granted access.



Seamlessly Pairs with FingerTec Terminals

The R2c is specially designed to seamlessly pair with FingerTec fingerprint models, which include R2 (FEM565), AC900, Q2i, H2i and R3*.

**Selected models only*



Access Control Management

All EM Lock driving outputs, alarm outputs, and anti-passback via the R2c can be diverted to be managed by a master terminal or Ingressus Controller in an access control system.



WEB LINK



Product
<https://product.fingertec.com>

Installation Guide


User Guide

Technical Tips

LAYOUT PLAN

System Communication


for illustration only

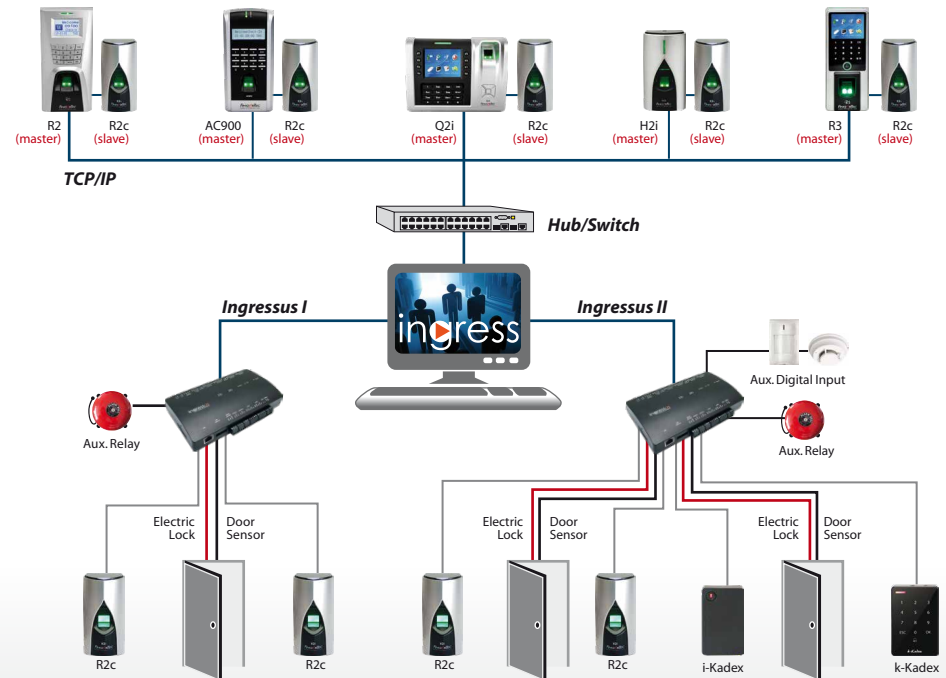

SPECIFICATIONS

MODEL	R2c
SURFACE FINISHING	Acrylonitrile butadiene styrene (ABS)
TYPE OF SCANNER	Non coated optical scanner
MICROPROCESSOR	Managed by master
MEMORY	
ALGORITHM	Supports BioBridge VX 10.0
PRODUCT DIMENSION (L X W X H), mm	64 x 42 x 135
STORAGE	
Fingerprint templates	Store in master terminal
Transactions	
ENROLLMENT & VERIFICATION	
Methods	Fingerprint (1:N)
Recommended fingerprint per user ID	Managed by master
Fingerprint placement	Any angle
Verification time (sec)	
FAR (%)	Managed by master
FRR (%)	
COMMUNICATIONS	
Method	RS485 (Connects to Master Terminal)
OPERATING ENVIRONMENT	
Temperature (°C)	0 ~ 45
Humidity (%)	20 ~ 80
Power input	Managed by master
ACCESS CONTROL	
EM lock driving output	
Alarm output	Managed by master
Anti passback	

NOTE: Specifications are subject to change.



Packaging

Dimension (mm) : 173 (L) x 60 (W) x 135(H)
 Weight : 0.34 kg



timeTec
www.timeteccloud.com
 TimeTec © 2021, All Rights Reserved

Authorized Reseller: