



## TA100 DIY

### Fingerprint Time & Attendance System

A brand new FingerTec TA100 DIY – Do It Yourself Time Attendance System is a product that combines management software in a fingerprint reader. Connection between fingerprint reader and computer will no longer be an issue along with lost of transaction logs.

Using the latest concept, all the clocking schedule settings and user management configurations are managed from the reader itself. The attendance report in HTML format will be generated into USB flash disk directly from the fingerprint reader with only a few presses on the keypad. Reader installation can be performed easily minus installation cost or the need for network cable extension.

The simplified FingerTec TA100 DIY works efficiently in providing vital attendance reports include information on tardiness, short hours and overtime.




#### FEATURES & BENEFITS

- One-to-Many (1:N) identification and One-to-One (1:1) verification
- Provide multi verification by using fingerprint and/or password
- Allow placing of fingerprint at any angle
- Provide user capacity of 800 fingerprint templates and 30,000 transaction logs
- Feature straightforward icons on the menu
- Offer easy enrollment and fast clocking system
- Offer 3 formats of attendance report
  - Electronic Time Card
  - Daily Attendance Listing
  - Staff Movement Analysis


## LAYOUT PLAN

### Layout Plan

for illustration only  
\*\* optional

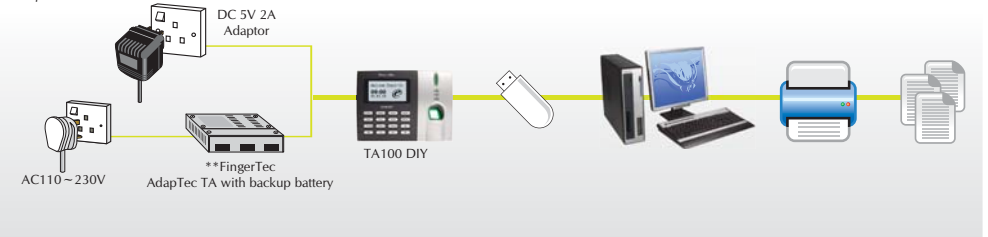

### Quick Start Guide

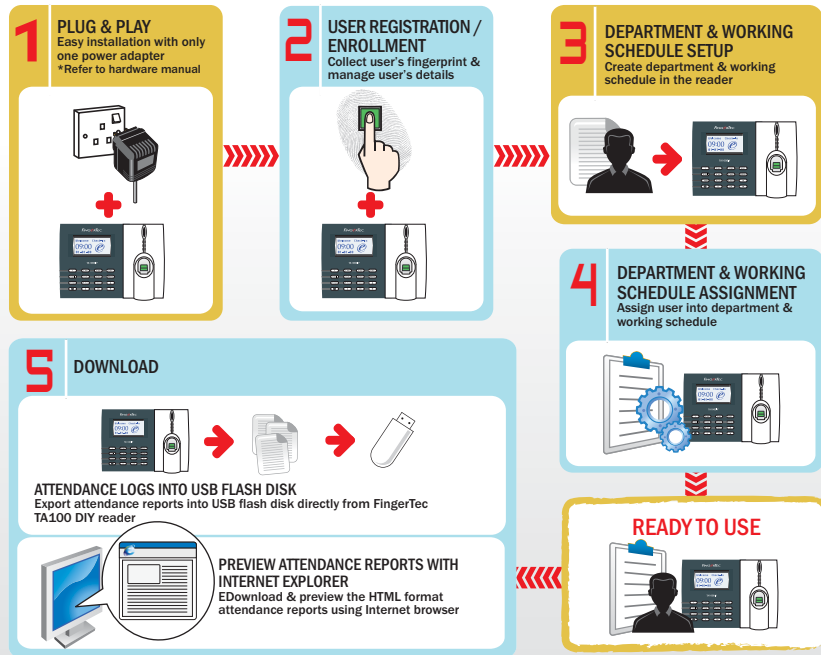

## SPECIFICATIONS

MODEL	TA100 DIY
<b>SURFACE FINISHING</b>	Acrylonitrile Butadiene Styrene (ABS)
<b>TYPE OF SCANNER</b>	Optical
<b>PRODUCT DIMENSION (L X W X H), mm</b>	190 x 52 x 140
<b>STORAGE</b>	
• Fingerprint templates	800
• Transaction	30000
<b>ENROLLMENT &amp; VERIFICATION</b>	
• Methods	Fingerprint (1:1, 1:N) , Password
• Recommended fingerprint per user ID	2
• Fingerprint placement	Any angle
• Verification time (sec)	< 1
• FAR (%)	< 0.0001
• FRR (%)	< 1
<b>COMMUNICATIONS</b>	
• Method	TCP/IP, RS232, RS485, USB flash disk
• Baud rates	9600, 19200, 38400, 57600, 115200
<b>OPERATING ENVIRONMENT</b>	
• Temperature (°C)	0 ~ 45
• Humidity (%)	20 ~ 80
• Power input	DC5V 2A
<b>TIME ATTENDANCE</b>	
• Siren	N/A
<b>MULTIMEDIA</b>	
• Voice	Yes
<b>VOICE / DISPLAY LANGUAGE (TERMINAL)</b>	English (Standard) / (Upon Request - Indonesian / Spanish / Turkish / Thai / Polish / Korea / Romanian / Portuguese / Dutch / Chinese / French / Slovenia/ Russian/ Greek / Hebrew / Persian / Italian / Vietnamese / Czech / Bulgarian)



### Packaging

Dimension (mm): 300(L) x 225(W) x 90(H)  
Weight : 1.4kg

Authorized Reseller:



**FINGERTEC**  
www.fingertec.com

©2010 FingerTec Worldwide Sdn. Bhd. All rights reserved.