timelec

Perfect the Cloud Solutions



TIMETEC QF PLUS

Wireless QR Code & Facial Recognition Terminal

TimeTec QF Plus is another great addition to enhance TimeTec cloud solutions. It is an Android terminal preloaded with the mobile QF Master App, which performs face recognition or QR code verification. When the QF Plus is paired with the TimeTec BLE-2 or BLE-5 controller via Bluetooth communication, it becomes a new breed of cloud access control system.



QR Code Verification Support machine-readable image as credential



Pairs with BLE-2/5 Perfectly paired with TimeTec Bluetooth Low Energy (BLE) Technology controller

Elegance Design A sophisticated, compact

installation

and slim model devised to fit

dimensions of door frame



I.

timeTec

Face Recognition Latest visible light facial recognition technology

Anti Passback

controlled area

TimeTec Cloud

Seamless integration

cloud solutions

with multiple TimeTec

Prevent users to second

enter the same security





Large Capacity Store up to 10,000 face templates and 1 million transaction logs



WiFi or 4G WiFi or 4G wireless connectable, clean installation and no wiring required




Desktop/Wall-Mount Come with a standard desktop stand and a wall





SYSTEM DIAGRAM

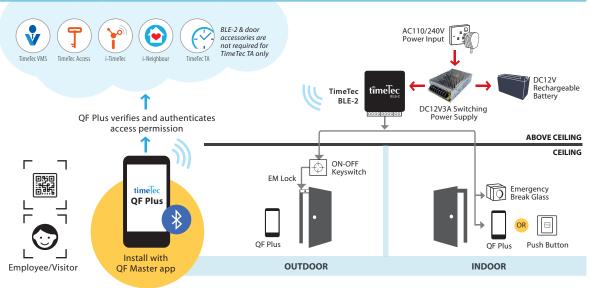

SPECIFICATIONS

	MODEL	TimeTec QF Plus
	SURFACE FINISHING	Acrylonitrile Butadiene Styrene (ABS)
	TYPE OF SCANNER	2MP Dual Camera
	OS	Android 8.1
	CPU	Quad-core, 1.5GHz
	MEMORY	RAM 2GB / ROM 16GB
	ALGORITHM	Face: BioBridge VX 9.0
	PUSH TECHNOLOGY	Yes
	DIMENSIONS	158 * 74 * 15.6mm
	TEMPLATES, TRANSACTION	10,000 face templates, 1,000,000 transaction
ENROLLMENT & VERIFICATION	• Methods	Face (1:N) and QR Code
	Verification time (sec)	Face < 1, QR Code < 1
	• FAR (%), FRR	Face: < 0.01, Face: < 0.1
COMMUNICATIONS	• Wi-Fi	2.4GHz, 5GHz, 802.11a / b / g / n
	• Bluetooth	4.0
	• 4G Wireless Broadband	Yes
	• USB & GPS	USB 2.0, GPS / A-GPS
MULTIMEDIA	• Voice	Yes
	• Display	720 x 1280, IPS touch LCD
	• Photo ID	Yes
	• Speaker	90DB (10cm distance)
	Microphone	1m clear voice pickup
	 Short messaging/ Day light saving timer 	Yes
OPERATING ENVIRONMENT	• Power	12V 2A
	Operating Temperature	-10°C - 50°C
	Operating Humidity	20% - 80%RH
TIME ATTENDANCE	• Work codes	Yes
	Fast transaction checking	Yes
ACCESS CONTROL	• Door Controller	TimeTec BLE-2
	EM Lock driving output	DC12V relay output
	Lock output type	NO/NC
	• Antipassback	Yes
	Transaction records/Event capacity	Unlimited, stored in cloud server
GENERAL	MOBILE OS	Android 4.0.2 and above, iOS 8.0 and above
	CLOUD software	i-TimeTec, TimeTec Access, TimeTec VMS, TimeTec TA, i-Neighbour

Note: Specifications are subject to change without prior notice.



Authorized Reseller: