

TimeTec Lift Control Panel BLE-16

Elevate Lift Technology through Smartphone Access

TimeTec Lift Control Panel BLE-16 is TimeTec's lift controller using the Bluetooth Low Energy 4.2 technology and the power of a smartphone for lift access in high-rise residential and skyscrapers.

There are 3 parts to a BLE-16; a main controller, a BLE reader and a power supply, all housed in a clean DIY metal enclosure. Floor selection board with associated relays is mounted separately in another enclosure. One BLE-16 controller can control 16 floors, one dedicated relay contact for each floor, and the controllers can be modularly expanded, making it a perfect choice for standard lifts and it is also customizable for different and unique requirements.

Choose BLE-16 and integrate it seamlessly with TimeTec VMS for office tower visitor management system, TimeTec Access for cloud access control system and i-Neighbour for residential management system and TimeTec Security for small office deployment. To achieve better security and convenience automation simultaneously.

TimeTec Lift Control Panel BLE-16 makes access secure, convenient and centralized. All you need to do is turn on the App and press on the lift access button!



Access to Specific Floors

Admin can preset authorized floors for every user through a cloud solution



Time Zone Settings

On top of restricting floor levels, admin can set time zone for restricted access




Smart Phone as Credential

Do away with card system; use user's own smartphone as access credential




Visitor Access Management

Provide one time or multiple accesses to authorized visitors to specific floor only



Tenant Access Management

Admin can set tenant access right accurately and fuss-free



Access to Different Floors

Depending on management / building rules, tenants and owners could be allowed access to various floors in the same building or neighbourhood



Statistic Report

Building manager can monitor and generate Access Activity Report daily, monthly and even on a yearly basis




Integration with TimeTec Cloud and its Apps

Seamless integration with TimeTec other useful solutions for better security and convenience



TimeTec BLE Lift Access

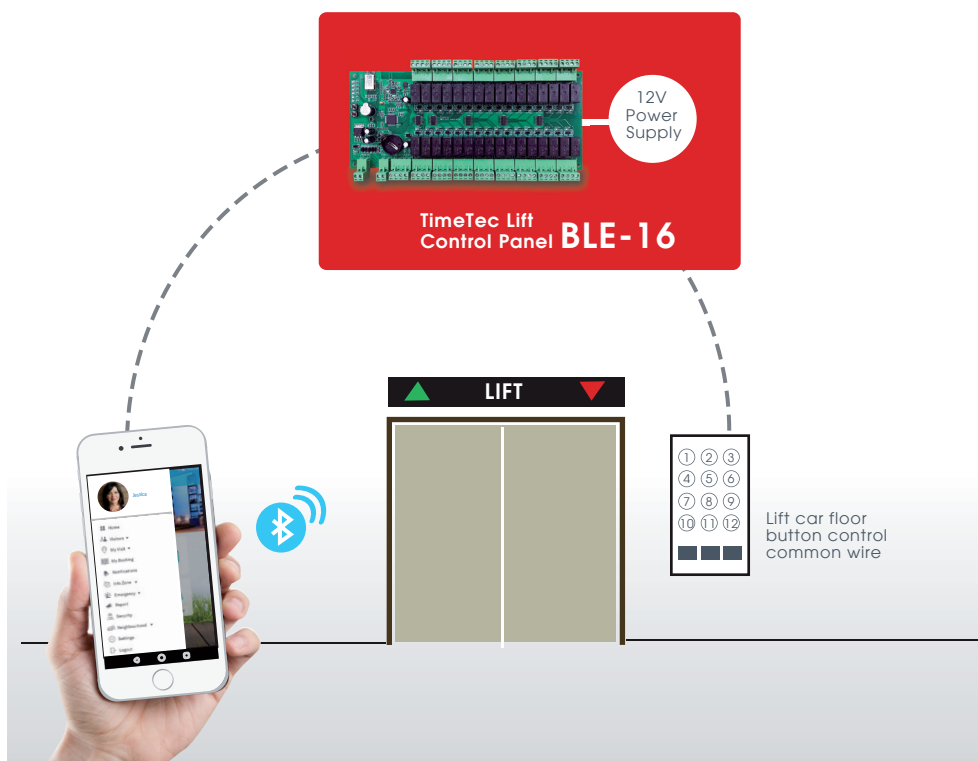

Specifications

Model	BLE-16
Channels	16 FORM C Relay output, Failed Safe bypass design
Floors	16 (extend by expansion board)
Dimension (mm)	180 (L) x 231 (W) x 62 (H)
Weighing (kg)	1.7
Power input	9 ~ 12 VDC
Working temperature °C	20 - 80
Humidity (%)	10 - 90
Communication	Dual BLE 4.0 & 4.2
Bluetooth Encryption	64-bit TimeTec Proprietary
LED indicator	Yes
Transaction records	Unlimited, stored in cloud server, local 1000 transaction
Event capacity	Unlimited
Mobile app	Android 4.0.2 and above, iOS 8.0 and above
App & Cloud	TimeTec Security, TimeTec Access, TimeTec VMS, i-Neighbour
Language (App & cloud)	Arabic, Chinese Simplified, Chinese Traditional, English, Hindi, Indonesian, Malay, Nepali, Spanish, Thai, Turkish, Vietnamese. <i>Other languages are available upon request.</i>

Note: Specifications are subject to change without prior notice.