



Mobile Access, TimeTec Smart Swing Turnstile STS 2100B & 2200B with BLE-2

Connect with TimeTec Smart Swing Turnstile STS 2100B and STS 2200B using only your smartphone's Bluetooth signal and gain quick access into the premise all without having to sacrifice the aspect of security. TimeTec Smart Swing Turnstile is designed with the idea of security in mind from the ground up. As such, it is built with no exposed screws in sight thus making it not only safer for users but it can also be effectively utilized to prevent any unauthorized individuals from gaining entry.

Other than smartphone, TimeTec Smart Swing Turnstile STS2100B & 2200B series also provide a default RFID card access as well as the capability to be integrated with biometric identifications; either fingerprint or face recognition as optional access credentials upon request.



Reliability

Besides high quality electrical components, SUS304 stainless steel casework ensures long-lasting durability.




Safety & User-Oriented Design

Barriers retract automatically during emergencies and during power outages using the batteries installed.



Aesthetic Design

No exposed screws, safer for users. Special designed case shape, sleek & compact and user-friendly for accessing.



Anti-Tailgate

The mechanical design of flap turnstile allows only the passage of a single person at a time, effectively curbing tailgate activities and improving security.



Mobile Access

With TimeTec BLE-2 built-in, it allows authorized users to access TimeTec Swing Turnstile by using their smartphone via TimeTec Access App/TimeTec VMS App/ i-Neighbour App.



Optional Biometrics Recognition Access

Comes standard with RFID card access besides mobile access, and can be integrated with fingerprint and face recognition modules as optional access credentials upon request.



Easy Integration

TimeTec Smart Swing Turnstile STS2100B & 2200B come standard with electrical interface design to ease the integration with third-party device.




Cost Effective


TimeTec Smart Swing Turnstile is designed with contactless feature for accessing as well as being cost effective for high traffic operation.



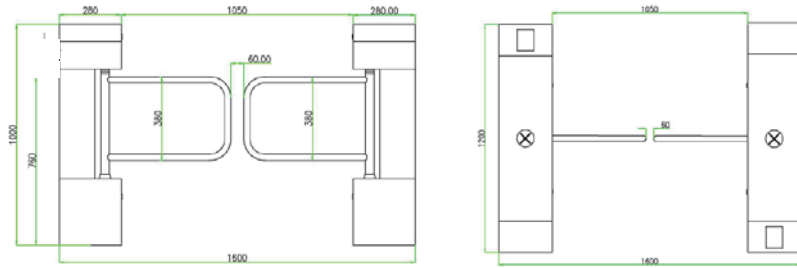

STS 2100B

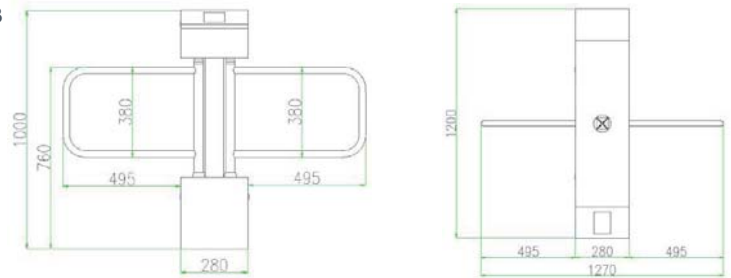

STS 2200B



Specifications

		
MODEL	STS 2100B	STS 2200B
POWER REQUIREMENTS	AC 220V/110V, 50/60Hz	AC110V/220v,50/60HZ
OPERATING TEMPERATURE	-28 °C- 60 °C	
OPERATING HUMIDITY	5%~80%	
WORKING ENVIRONMENT	Indoor/Outdoor	
SPEED OF THROUGHPUT	RFID/ Bluetooth* : Maximum 42/ minute * Assuming users have already initiated the mobile app	
LANE WIDTH(MM)	1,050	
FOOTPRINT(MM*MM)	1610*1200	1270*1200
DIMENSION(MM)	L=1200,W=280,H=1000	
PACKAGE DIMENSION(MM)	L=1310,W=800,H=1100	L=1310,W=420,H=1100
NET WEIGHT(KG)	118	68
GROSS WEIGHT PACKAGE(KG)	160	96
LED INDICATOR	Yes	
CABINET MATERIAL	SUS304 Stainless Steel	
LID MATERIAL	SUS304 Stainless Steel	
BARRIER MATERIAL	SUS304 Stainless Steel	
BARRIER MOVEMENT	Swing	
EMERGENCY MODE	Yes	
SECURITY LEVEL	Medium	
MCBF	2 million	

Note: Specifications are subject to change without prior notice.

Authorized Reseller: