

## TimeTec Lift Control Panel BLE-16


### Elevate Lift Technology through Smartphone Access

TimeTec Lift Control Panel BLE-16 is TimeTec's lift controller using the Bluetooth Low Energy 4.2 technology and the power of a smartphone for lift access in high-rise residential and skyscrapers.

The BLE-16 and a power supply housed in a clean DIY metal enclosure. Floor selection board with associated relays is mounted separately in another enclosure. One BLE-16 controller can control 16 floors, one dedicated relay contact for each floor, and the controllers can be modularly expended, making it a perfect choice for standard lifts and it is also customizable for different and unique requirements.

Choose BLE-16 and integrate it seamlessly with TimeTec VMS for office tower visitor management system, TimeTec Access for cloud access control system and i-Neighbour for residential management system to achieve better security and convenience automation simultaneously.

TimeTec Lift Control Panel BLE-16 makes access secure, convenient and centralized. All you need to do is turn on the App and press on the lift access button!



#### Access to Specific Floors

Admin can preset authorized floors for every user through a cloud solution



#### Time Zone Settings

On top of restricting floor levels, admin can set time zone for restricted access




#### Smart Phone as Credential

Do away with card system; use user's own smartphone as access credential



#### Visitor Access Management

Provide one time or multiple accesses to authorized visitors to specific floor only



#### Tenant Access Management

Admin can set tenant access right accurately and fuss-free



#### Access to Different Floors

Depending on management / building rules, tenants and owners could be allowed access to various floors in the same building or neighbourhood



#### Statistic Report

Building manager can monitor and generate Access Activity Report daily, monthly and even on a yearly basis




#### Integration with TimeTec Cloud and its Apps

Seamless integration with TimeTec other useful solutions for better security and convenience



TimeTec BLE Lift Access

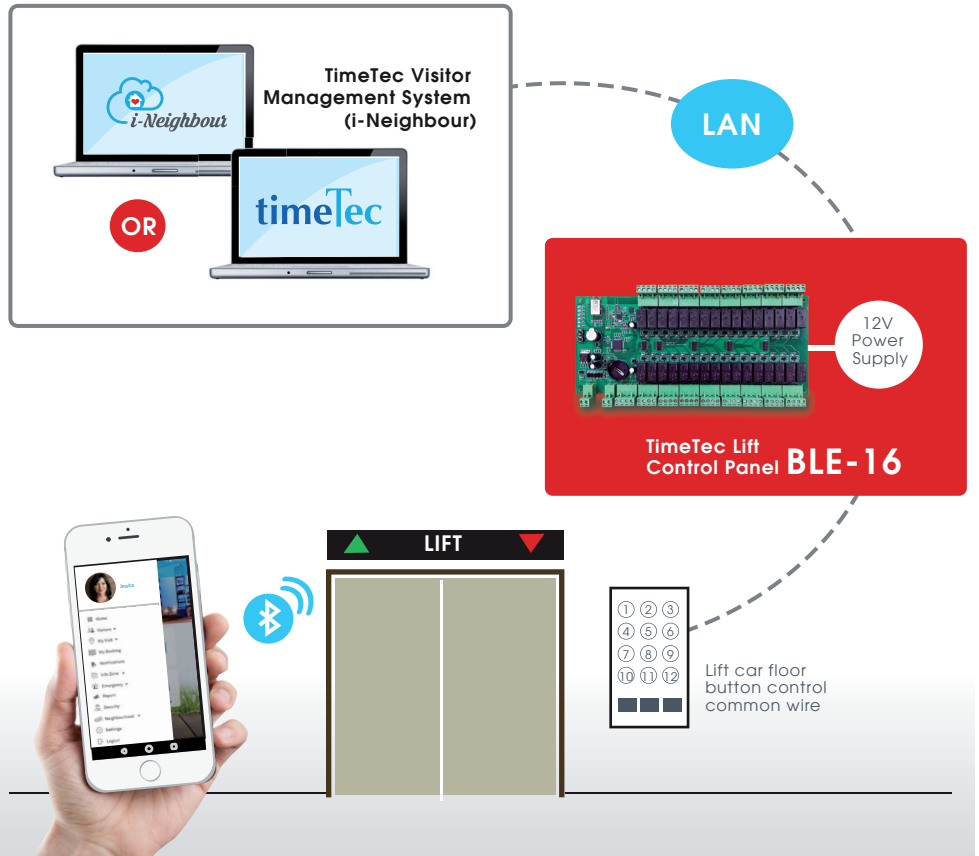

Specifications

Model	BLE-16
Channels	16 FORM C Relay output, Failed Safe bypass design
Floors	16 (extend by expansion board)
Dimension (mm)	180 (L) x 231 (W) x 62 (H)
Weighing (kg)	1.7
Power input	9 ~ 12 VDC
Working temperature °C	20 - 80
Humidity (%)	10 - 90
Communication	Dual BLE 4.0 & 4.2
Bluetooth Encryption	64-bit TmeTec Proprietary
LED indicator	Yes
Transaction records	Unlimited, stored in cloud server, local 1000 transaction
Event capacity	Unlimited
Mobile app	Android 4.0.2 and above, iOS 8.0 and above
App & Cloud	TimeTec Security, TimeTec Access, TimeTec VMS, i-Neighbour
Language (App & cloud)	Arabic, Chinese Simplified, Chinese Traditional, English, Hindi, Indonesian, Malay, Nepali, Spanish, Thai, Turkish, Vietnamese. <i>Other languages are available upon request.</i>

*Note: Specifications are subject to change without prior notice.*

Authorized Reseller:



**timeTec**  
www.timeteccloud.com

©2018 Timetec Computing Sdn Bhd. All rights reserved.