

Alarm Siren & Strobe, SS-911

Get Loud During Emergencies



Alarm Siren & Strobe (SS-911)




Amplify urgency during emergencies with i-Neighbour alarm siren & a strobe light, SS-911. In an environment where the i-Neighbour Siren Kit controller SK-911 is installed with the i-Neighbour Residential Management System, you can easily plug in the alarm siren with strobe light, SS-911 for better emergency management.

When a Panic Button in i-Neighbour App is pushed during emergencies, the siren will set off and flash the strobe light to call for attention.

Features

- ABS surface finishing for better durability against weather conditions and humidity
- IP 54 rating, suitable for outdoor installation
- Conformal coated electronic circuit board as second protection against water
- 2 ways tamper switch protection to prevent illegal bypassing
- LED indicator to ease diagnosis and troubleshooting
- Backup battery included in case of power failure

Installation Diagram *for illustration only

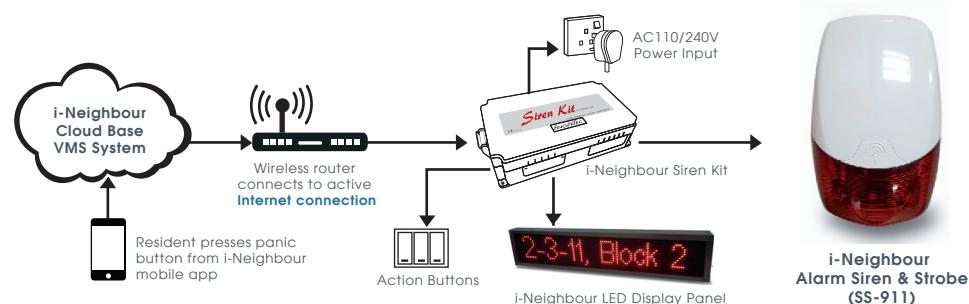

Mobile Application:



Specifications

Surface finishing	ABS
Operating power input	12 ~ 15VDC 1.2A
Siren operating consumption	12VDC 220mA
Strobe light operating consumption	12VDC 180mA
Size(mm)	265 x 170 x 65
Weight (kg)	0.65
Siren volume	120±3db@1m
Strobe light flash rate	≥ 70 times/min
Tamper protection	2
IP rating	IP-54
Backup battery	12v1.2A sealed lead battery
Certificate	CE, EMC