

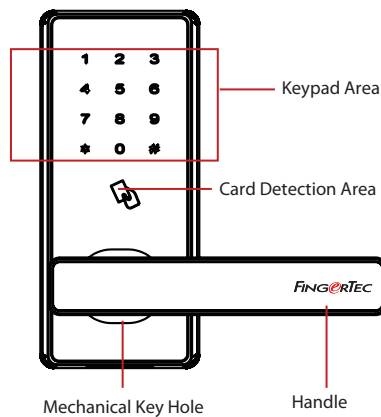


DL-30B

Terminal Overview

• DL-30B

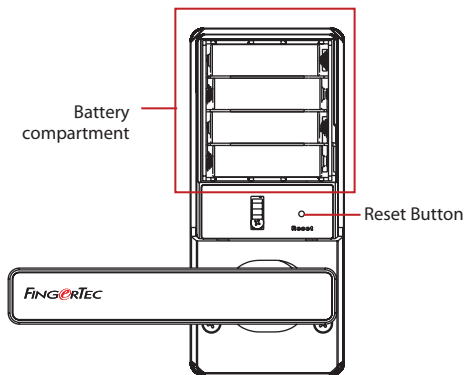

1 Download TimeTec Security App



Download TimeTec Security App to manage DL-30B Smart Lock efficiently.

To download the App, scan the QR Code below.



2 Register An Account

1. The lock owner or the initial person who handles the lock is the Admin.
2. Before any user can access to TimeTec Security App, the Admin has to create an account using an email address of a user.
3. The user will receive an email confirming that he has been registered an account by the admin

3 Activate the Account

1. Launch the TimeTec Security app that you have downloaded.
2. Activate your TimeTec Security account by following the instructions received in the email.

4 Login and Use

1. Login to the App by using the registered email and password.
2. Tap **Menu** > **Smart Access** > **Unlock Doors**
3. The App will start to search for nearby smart locks and display the list on screen
4. Tap **Unlock** to open the smart lock of your choosing

Note: Ignore the following smart lock operation steps if you are only using the App.

Commands for DL-30B without Using TimeTec Security App

Power On	Touch keypad to power on the smart lock
Register First Admin	Power on > 0 # > 3-digit user ID > Enter password/card
Register Admin	Power on > 0 # > Verify Admin > 1 > 1 > 3-digit user ID > Enter password / card
Register Normal User	Power on > 0 # > Verify Admin > 1 > 1 > 3-digit user ID > Enter password/card
Delete by User Number	Power on > 0 # > Verify Admin > 2 > 1 > 3-digit user ID > Re-enter 3-digit user ID
Delete by Group	Power on > 0 # > Verify Admin > 2 > 2 > 1 or 2
Register Another Admin	Power on > 0 # > Verify Admin > 3 > 3-digit user ID > Re-enter 3-digit user ID > Enter password/card
Enable Normal Open	Power on > 0 # > Verify Admin > 4
Volume	Power on > 0 # > Verify Admin > 01 > Press 1 once will decrease the volume by 1 level, pressing 2 once will increase the volume by 1 level > #
Mute	Power on > 1 #

Note:

Password is a 6-digit number like 124890.

• When you verify an admin using a password, please end it with a #.

• Press * to cancel a registration if required in between registration process.

You can view the complete Admin & User Guide in the App or <http://info.fingertec.com/DL30B-3>