



## SMART SCENARIO PANEL

AUTOMATION PRESETS FOR YOUR HOME

User Guide

## PRODUCT BRIEF



The **TimeTec Smart Scenario Panel** can use as master switch in the smart home system. It has 4 programmable scenarios which can be easily set up within **i-TimeTec smartphone App**.

## FEATURES

- ① Soft touch control button
- ② Beeper for operation
- ③ LED indicator
- ④ i-TimeTec Smartphone App control

## TECHNICAL SPECIFICATION

Working voltage: AC 180V-250V 50Hz

Standby current:  $\leq 4\text{mA}$

Working temperature:  $-10 - 55^{\circ}\text{C}$

Working humidity:  $\leq 90\%\text{RH}$

Communication distance:  $\leq 100\text{M}$  (open environment)

Number of scenarios: 4

Default scenario: Home, Away, Guest, All Off

Dimension: 85mm x 85mm x 36mm

Installation: flush mount

## HOW TO USE

### How to add the device to your smart home system?


- Log in to your i-TimeTec App account
- In the main menu, select Add Device, then scan the QR code of the device (QR code is on the back and also on the PCB after remove the front panel).
- Add the device to the TimeTec Smart Gateway or TimeTec Smart Camera Gateway.

---


**Note:** Before Add the device, there must be at least 1 scenario already set up in the system.

---

- Connect the device to electricity wires, power it up so it will connect to the TimeTec Smart Gateway by wireless.
- Touch the button to select the scenario that you want to use.
- To quit from the system: Delete the device from the App. Press one button of the device, hold for 15 seconds. While the LED indicator flashing, release the button

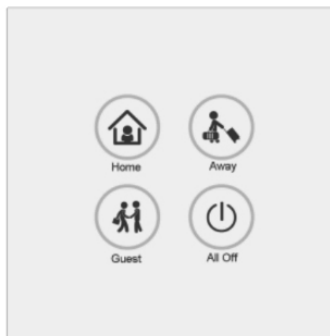


## WIRING DIAGRAM

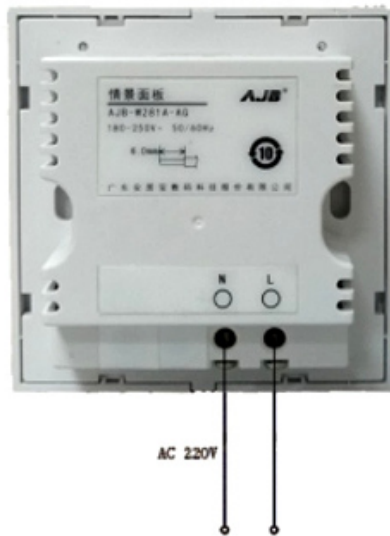

## INSTALLATION

- Install the standard 86 electric box onto the wall
- Connect the electric wires to the switch correctly
- Fix the switch onto the 86 electric box with screws
- Fix the front panel onto the switch
- Finish the installation

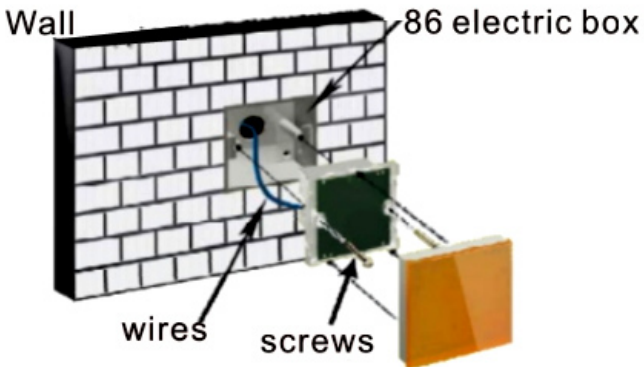

## TROUBLESHOOTING

- **If Smart Scenario control fail:**

Check whether the device is already added and connected to the TimeTec Smart Gateway

- **Scenario wrong:**

Check the front panel is fixed onto the device with correct direction.

## IMPORTANT NOTICES

- The device shall be installed in a dry place without chemical corrosion.
- The device shall be installed in a place without high electromagnetic interference.
- Do not connect to the electricity supply during installation. Double check the wiring before power it up.
- Please contact service agent if the unit does not work properly.

